


**AMERICAN STANDARD
Finishing, Topping
Single Thread, Right Hand**



American Standard
ANSI/RMA IP-24-1983

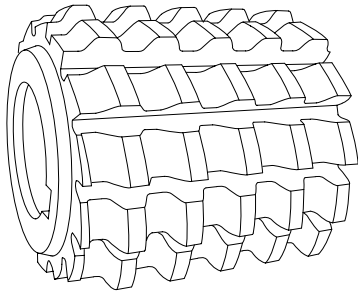

**HTB SERIES
TIMING BELT**

Belt	Pitch	OD	Length	Tooth Range	Bore	Approx. Whole Depth	Specify Ground B, C, D
XXL	40 DP	1	3/4	10-23 T	8mm	.021	HTB-040-10M
XXL	40 DP	1	3/4	24 T & Up	8mm	.021	HTB-040-24M
XXL	40 DP	1-1/8	1-1/8	10-23 T	1/2	.021	HTB-040-10H
XXL	40 DP	1-1/8	1-1/8	24 T & Up	1/2	.021	HTB-040-24
XXL	40 DP	1-7/8	1-1/2	10-23 T	3/4	.021	HTB-040-10S
XXL	40 DP	1-7/8	1-1/2	24 T & Up	3/4	.021	HTB-040-24S
MXL	1/12.5	1	3/4	10-23 T	8mm	.026	HTB-080-10M
MXL	1/12.5	1	3/4	24 T & Up	8mm	.026	HTB-080-24M
MXL	1/12.5	1-1/8	1-1/8	10-23 T	1/2	.026	HTB-080-10H
MXL	1/12.5	1-1/8	1-1/8	24 T & Up	1/2	.026	HTB-080-24H
MXL	1/12.5	1-7/8	1-1/2	10-23 T	3/4	.026	HTB-080-10S
MXL	1/12.5	1-7/8	1-1/2	24 T & Up	3/4	.026	HTB-080-24S
-	1/8	1-7/8	1-7/8	10 T & Up	1/2	.035	HTB-012-10H
-	1/8	1-7/8	1-7/8	10 T & Up	3/4	.035	HTB-012-10S
XL	1/5	1-7/8	1-7/8	10 T & Up	3/4	.056	HTB-200-10S
XL	1/5	2-1/4	2	10 T & Up	1-1/4	.056	HTB-200-10
L	3/8	1-7/8	1-7/8	6-9 T	3/4	.085	HTB-375-6S
L	3/8	1-7/8	1-7/8	10 T & Up	3/4	.085	HTB-375-10S
L	3/8	2-1/2	2-1/2	10 T & Up	1-1/4	.085	HTB-375-10
H	1/2	2	2	12-19 T	3/4	.102	HTB-500-12S
H	1/2	2	2	20 T & Up	3/4	.102	HTB-500-20S
H	1/2	2-3/4	2-3/4	12-19 T	1-1/4	.102	HTB-500-12
H	1/2	2-3/4	2-3/4	20 T & Up	1-1/4	.102	HTB-500-20
XH	7/8	3-1/2	3-1/2	18 T & Up	1-1/4	.272	HTB-087-18
XXH	1-1/4	4-1/2	5	18 T & Up	1-1/2	.406	HTB-125

Also conforms to British STD 4548.

Pressure angle varies by design, ie., 40 DP is 30° PA (w/chamfer), 1/5 CP is 25° PA, and all others listed are 20° PA.